

## Roof Preparation


Harveytiles are normally used with standard 114 x 38mm timber trusses in conjunction with 38 x 38mm battens. To save cutting and waste of tiles, rafter and batten lengths should be designed to suit an exact number of full tile courses.

## Truss Configuration

Consult Harvey Roofing Products or a reputable manufacturer for optimum truss designs. For normal applications, using a 38 x 38mm batten, maximum truss spacing of 1,1m is permitted.

## Batten Spacing - Elitetile, Tufftile, Academytile and \*Shaketile

*Note: The correct batten spacing is critical for a leak proof roof and must be as shown*

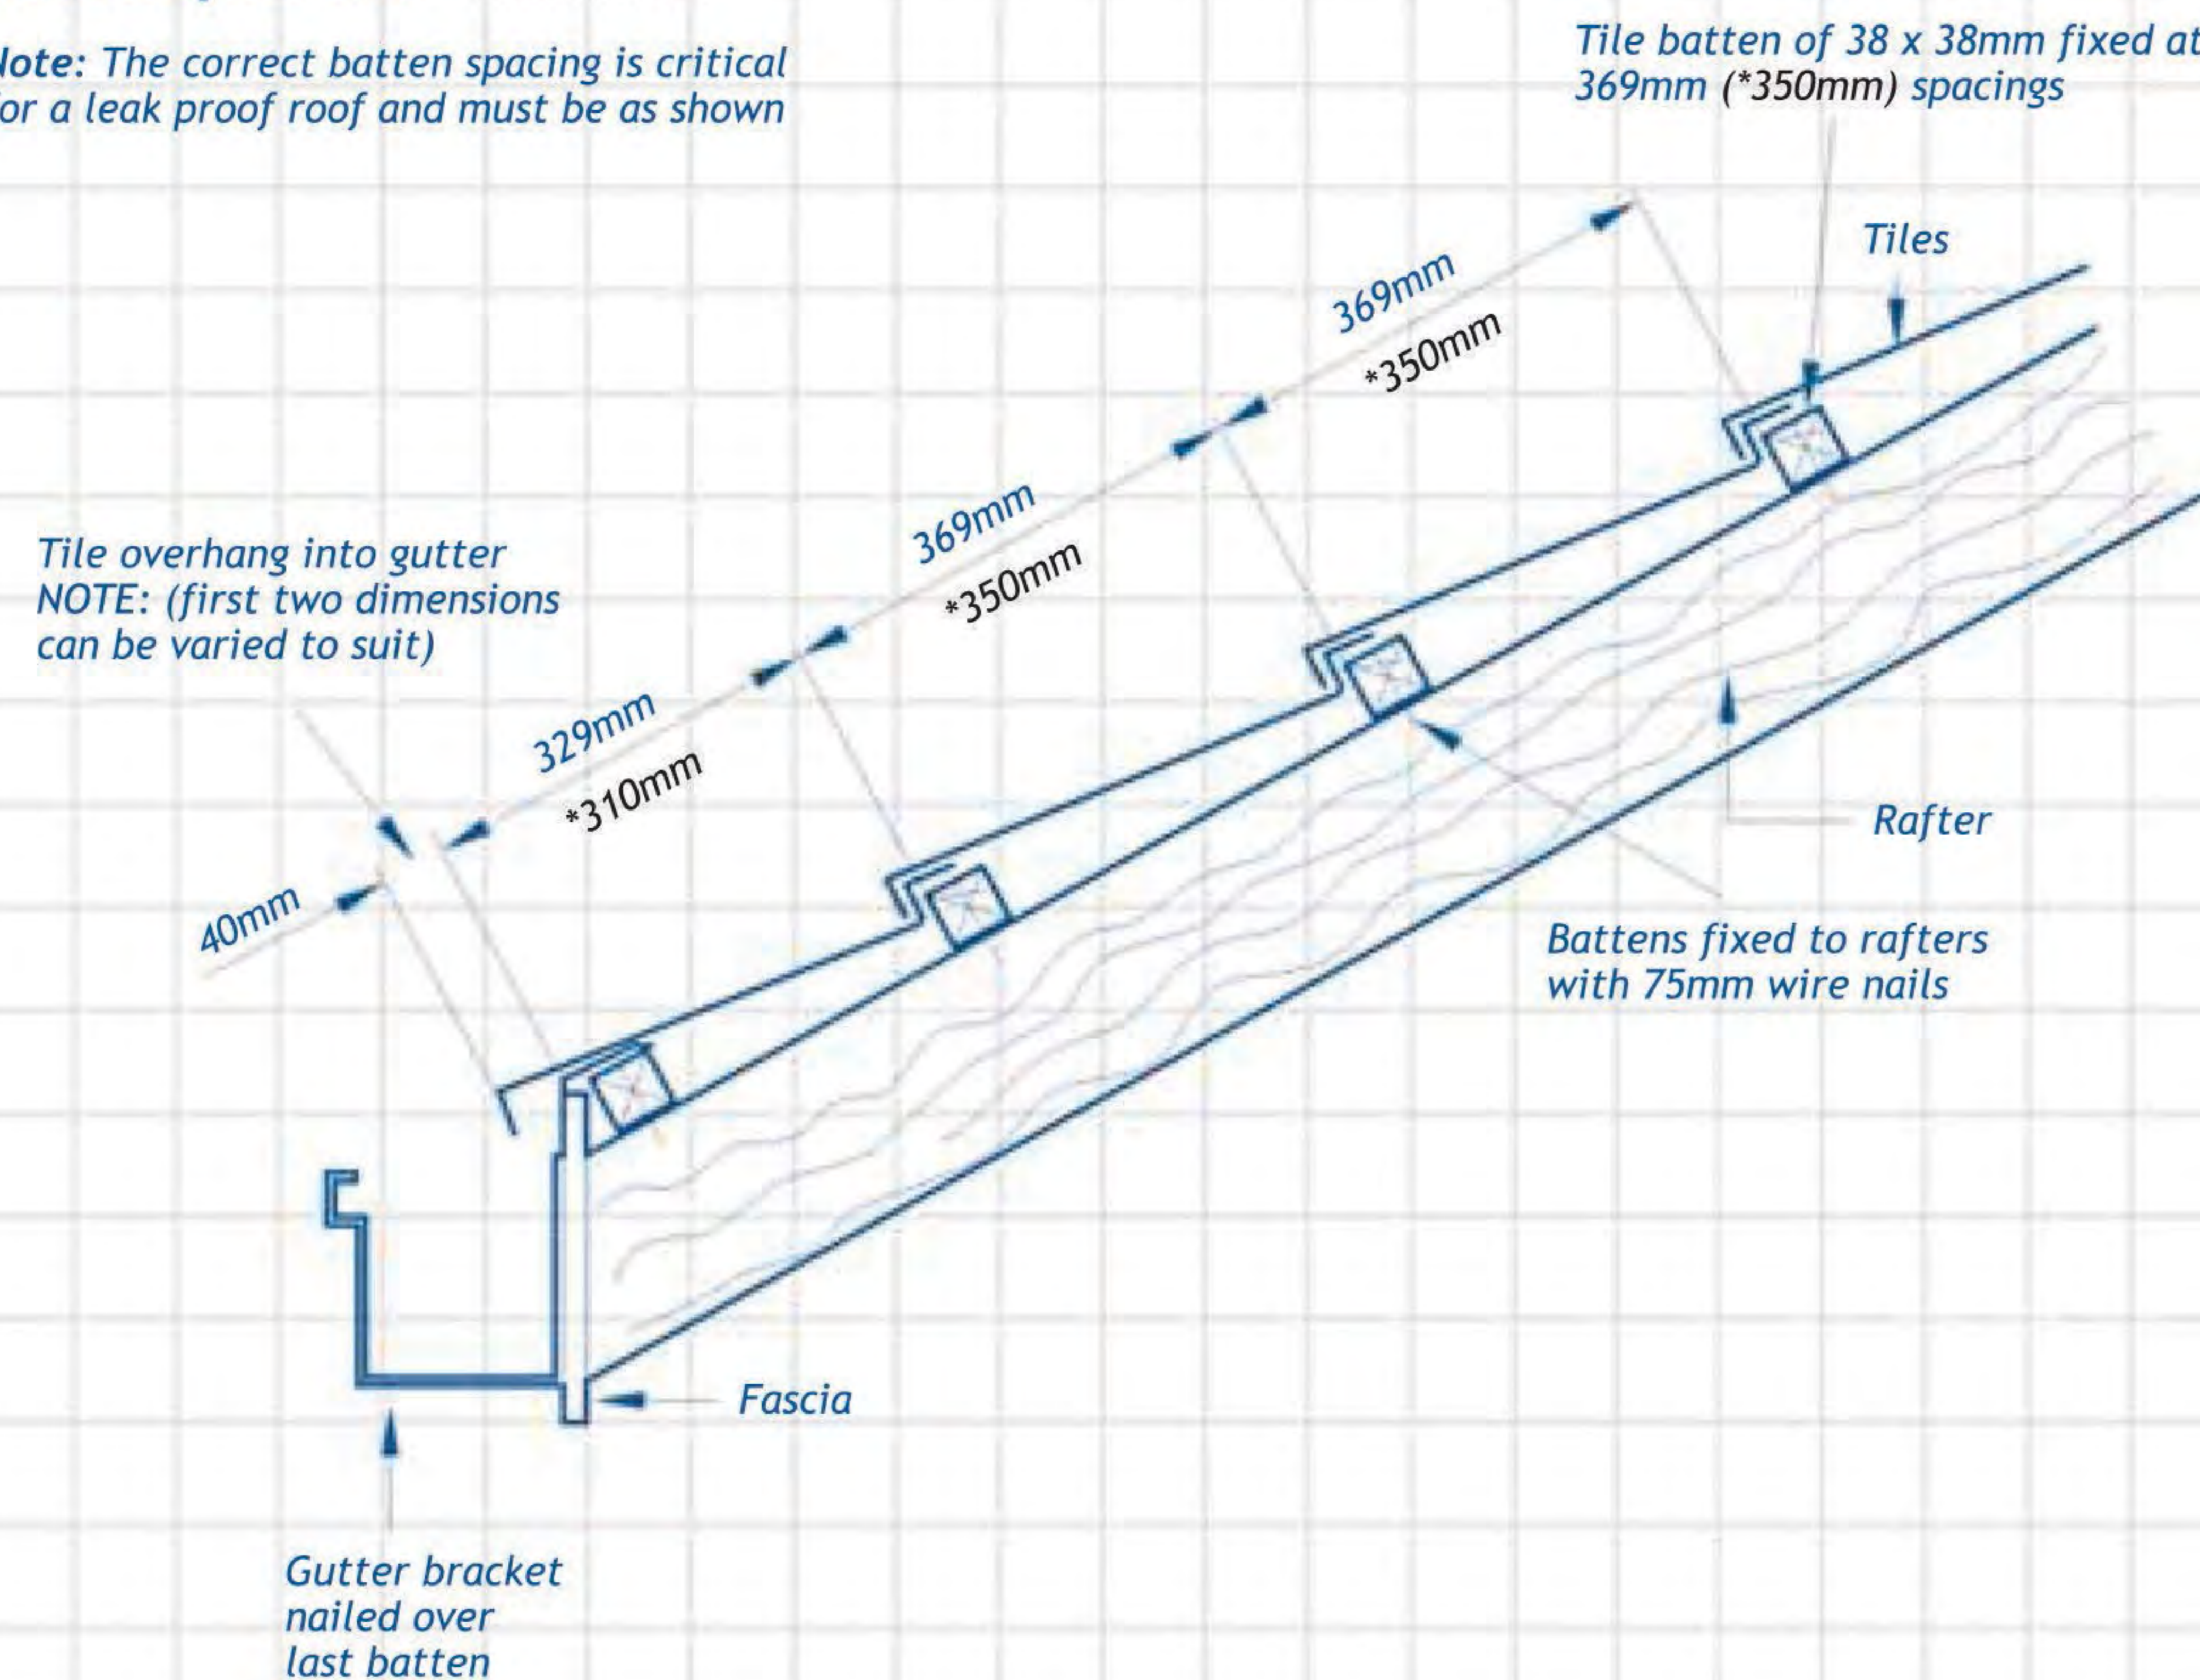

## Pitch

The tiles can be used without underlay on roof pitches between 15° and 45°, from 10° to 15° with underlay.

## Nailing Of Tiles

To prevent leaks, tiles must never be nailed through the top weather surface, except at eaves. Tiles are secured with 40mm - 45mm serrated galvanized clout nails as shown.

## Touching Up Nail Heads

All exposed nail heads must be spotted with touch-up paint.

## Cut Edges


Any cut edges must be coated with touch-up paint.

## Nailing Of Tiles

*Note: Position of nails must be on upturn to prevent leaks*

4 nails to be nailed through downturned front flange of the tile into side of tile batten

2 nails to be nailed through horizontal lip of back flange of tile into top of batten

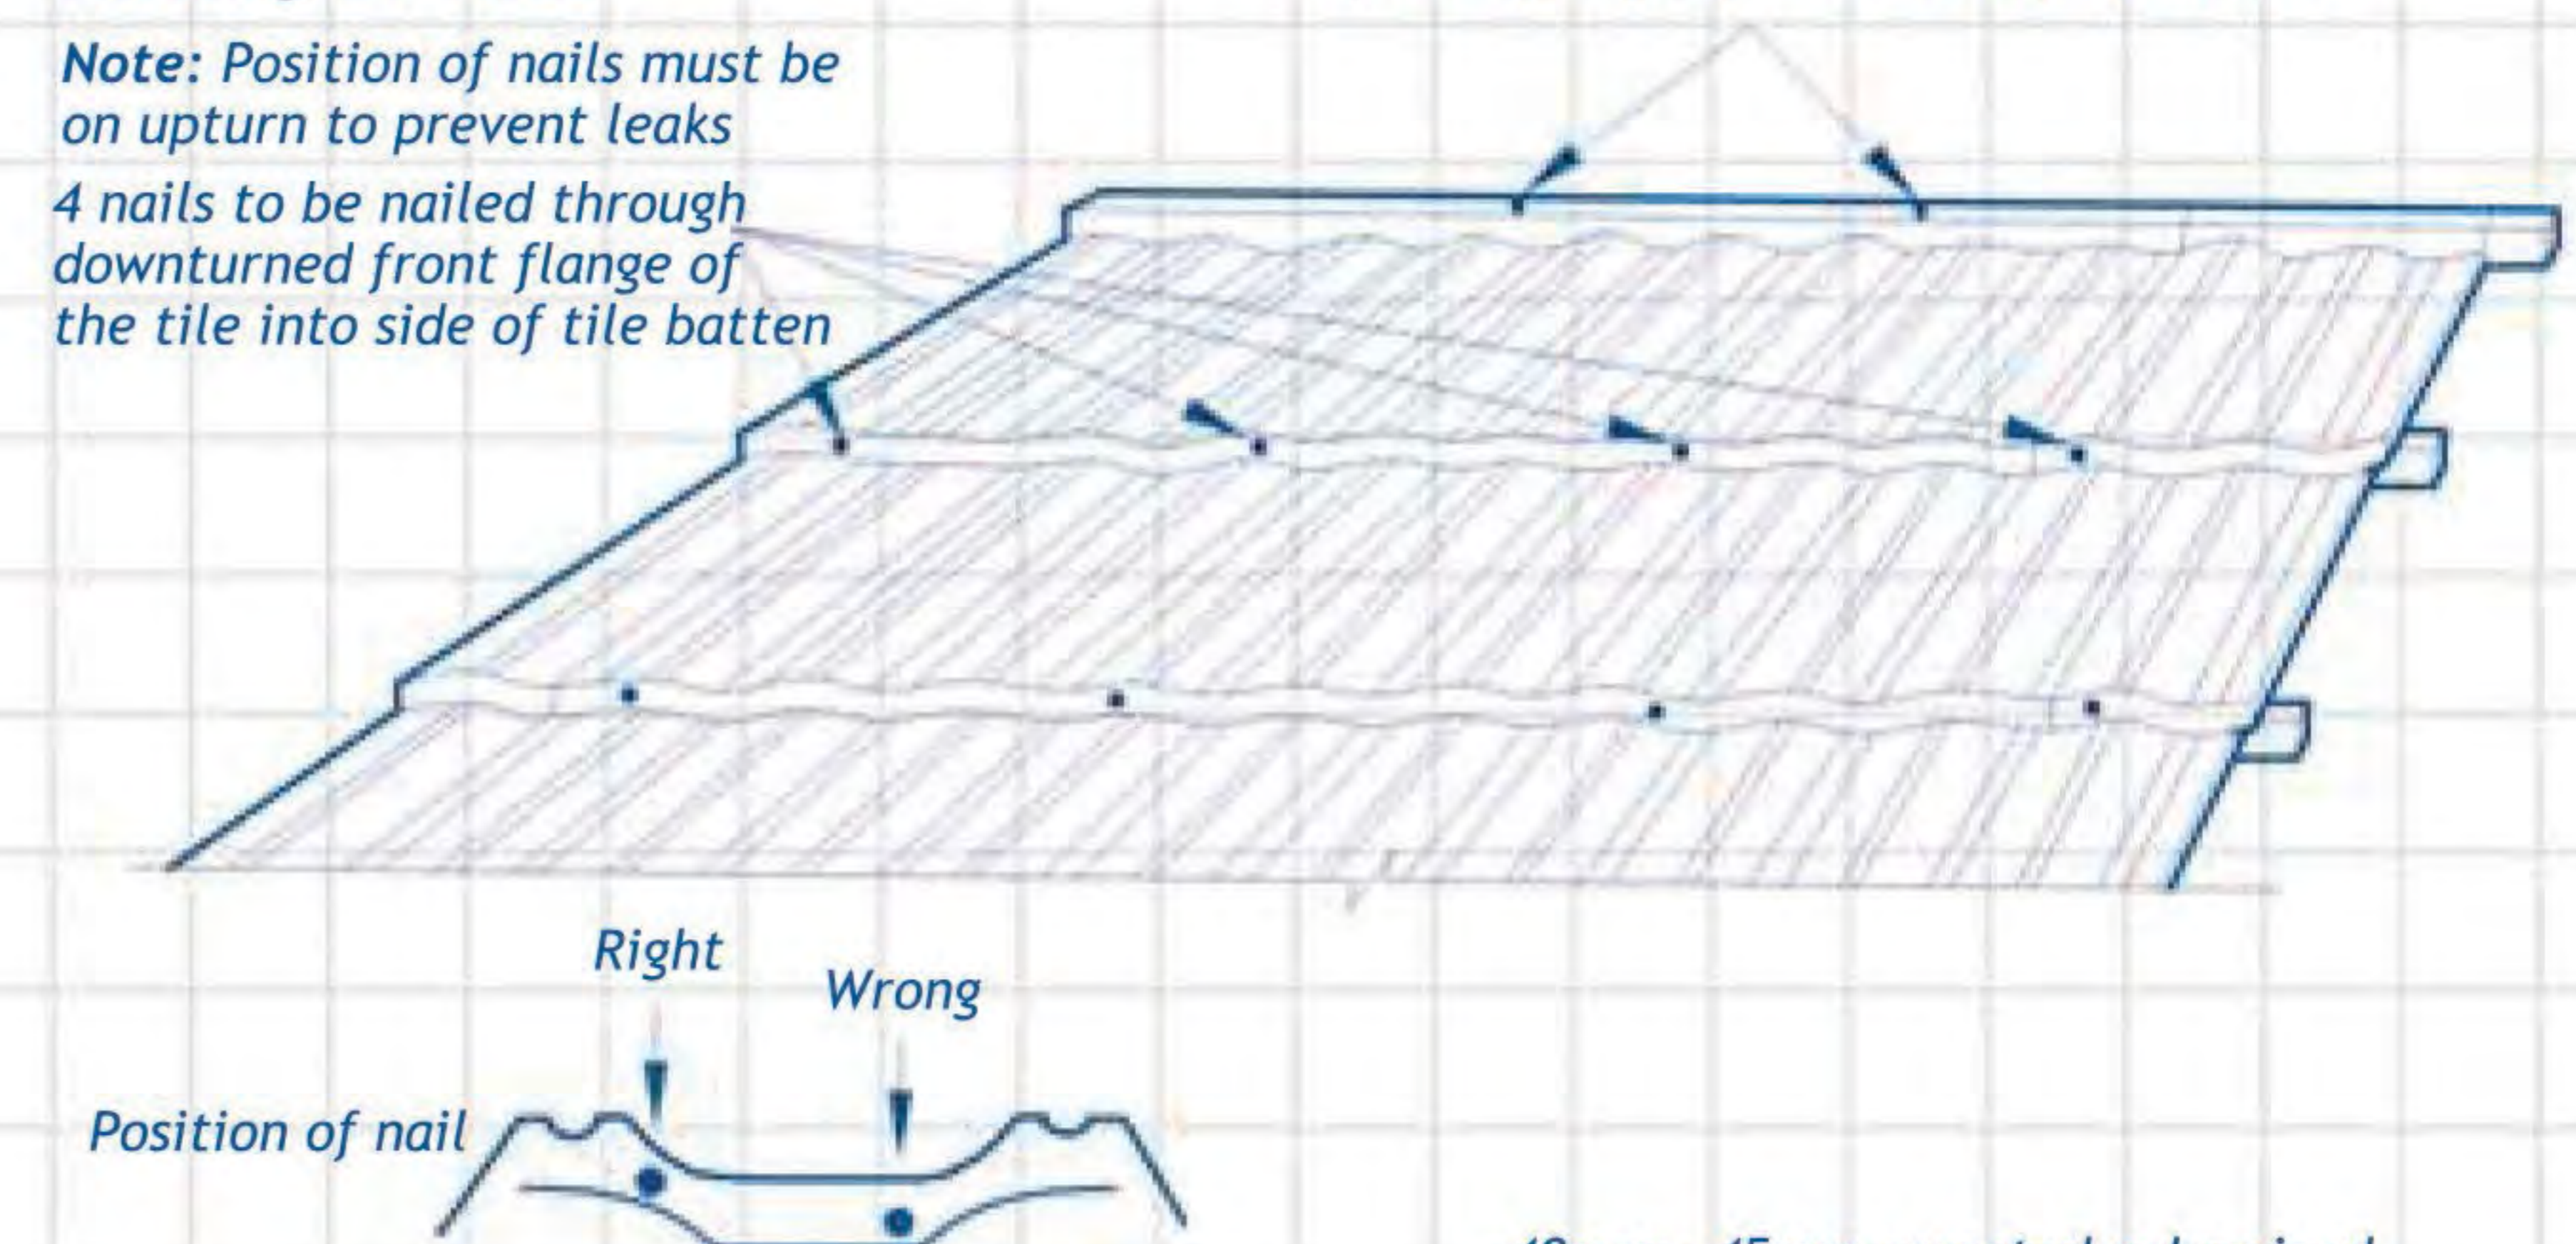

40mm - 45mm serrated galvanized clout nails, nailed through horizontal flange lip at back of tile (2 per tile)

40mm - 45mm serrated galvanized clout nails, nailed through the nose of the tile (4 per tile)

