

Harvey Roofing Products

HARVEYTILE
Product Range

If it doesn't say **Harveytile**
it's not a Harveytile



Tel: +27 11 741 5600
Fax: +27 11 813 3639
www.harveyroofingproducts.co.za
www.macsteel.co.za

MACSTEEL Africa's leading steel supplier

Harvey Roofing Products

Selecting any building product is a process fraught with potential problems.

Not only does one need to satisfy oneself that the product is valid for the application, one must also be totally confident that the product is reputable, reliable and well established.

Since 1967 Harvey Roofing Products have been manufacturing steel roofing tiles and accessories, and from modest beginnings their products, through high quality and service, have evolved into one of the sturdiest and most attractive roofing systems available on the market.

Strong Foundations

The same strict code of professionalism, quality and service has placed the company at the top of the steel roofing business, and their reputation has been steadily extended through the obvious satisfaction of Specifiers, Builders and Homeowners alike.

Strong On Looks

Harvey Roofing Products manufactures several roofing systems.

Their range of roof tiles is of superb structural integrity and immaculate appearance. Their world-class factory based in Brakpan, South Africa, is one of the largest of its kind in the world and maintains high quality standards.

Strong In Design

Each steel based tile is designed and manufactured for strength.

The unique overlapping system and fixing technique provide not only a leakproof roof but also a form of burglar proofing. All tiles are available in galvanised mild steel substrate or alternatively in Alu-Zinc coated mild steel for added longterm corrosion resistance.

Durable

Through on-going research, the acrylic coating which was developed in 1970 can now withstand high ultra-violet levels and the most adverse weather conditions. The small stone granules bonded to the tile surface result in a durable finish which protects against extensive weathering such as gale force winds, pelting rain and hailstorms.

Maintenance Free

The tiled roof is low on maintenance, which means you don't have the inconvenience of fixing leaks, replacing broken tiles and reduced painting frequency.

Versatility

The tiles are also superb for re-roofing, easily turning your house into a prize home in just two to three days.

Strong On Savings

The excellent weight-to-strength ratio means that, with our tiles, you invest your money in the tiles and not in costly roof structures.

Weatherproof


The durable, steel-based tile can withstand the impact most of the elements including hailstorms. Contact Harvey Roofing Products for guidelines in atmospheric corrosive / coastal area applications.

The Alu-Zinc tile option is the combination of structural protection through zinc, with the barrier protection of aluminium, and this allows for superior performance to galvanised coatings in some environments.



PRODUCT RANGE


Elitetile



Tile Specification (Approx.)

Overall Length: 1675 mm
Cover: 1600 mm
Overall Width: 397 mm
Cover: 369 mm
Mass per tile: 3,9 kg
Mass per sq. metre: 6,6 kg
No. of tiles per sq. metre: 1,69


Tufftile



Tile Specification (Approx.)

Overall Length: 1675 mm
Cover: 1600 mm
Overall Width: 397 mm
Cover: 369 mm
Mass per tile: 3,9 kg
Mass per sq. metre: 6,6 kg
No. of tiles per sq. metre: 1,69

Harvey Shake Tile



Tile Specification

Overall Length: 1675 mm
Cover: 1 625 mm
Overall Width: 395 mm
Cover: 350 mm
Mass per tile: 4,2 kg
Mass per sq. metre: 6,9 kg
No. of tiles per sq. metre: 1,69

HarveyThatch Tile



Tile Specification

Overall Length: 1675 mm
Cover: 1 625 mm
Overall Width: 395 mm
Cover: 350 mm
Mass per tile: 4,2 kg
Mass per sq. metre: 6,9 kg
No. of tiles per sq. metre: 1,69

Standard Acrylic colour range

(additional non-standard colours available)

Dark Blue



Black




Terracotta



Green




Burgundy

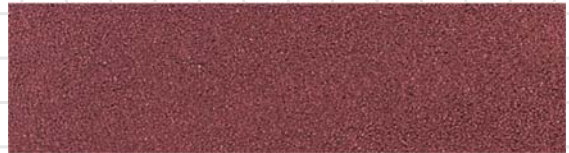

Colours on screen and print may differ from the actual roof tile paint. Information may change without prior notice. Please confirm current specifications for the latest information.


Accessories

Angle Ridge




Fixed to double batten at apex
 Length: 1720mm
 (cover 1600mm)
 Width: 125mm tapered
 lengthwise
 Height: 95mm
 Mass: 2.5kg

Angle Hip Cap




Fixed to double batten at hip battens
 Length: 580mm
 (cover 1 per tile course)
 Width: 125mm tapered down
 to 123mm
 Height: 75mm tapered up to
 105mm

Square Ridge




Fixed to double batten at apex
 Length: 1720mm
 (cover 1600mm)
 Width: 48mm tapered
 lengthwise
 Height: 70mm
 Mass: 1.8kg

Square Hip Cap




Fixed to single hip batten
 Length: 580mm
 (cover 1 per tile course)
 Width: 48mm tapered down
 to 45mm
 Height: 42mm tapered up
 to 70mm
 Mass: 0.5kg

Gable Trim




Fixed to gable ends
 Length: 1720mm
 (cover 1600mm)
 Width: 60mm
 Height: 68mm tapered up
 Mass: 1.8kg

Shake Trim



Length: 395mm
 Width: 170mm
 Mass: 0.6kg
 Cover: 370mm


Bargeboard Cover



Left and right hand serrated. Fixed to barge boards at gable ends. Sketch shows right handed barge board cover.

Length: 1550mm Height: 130mm
 cover 4 tile courses Mass: 2.3kg


Sidewall flashing



Left and right handed serrated. Sketch shows right handed sidewall.

Length: 1550mm Height: 115mm
 cover 4 tile courses Mass: 2.4kg
 Width: 170mm Upper Lip: 10mm

Cover flashing



For use at headwall and sidewall flashing as well as for short courses at ridge.

Length: 1720mm Upper Lip: 25mm
 Cover: 1600mm Mass: 2.5kg
 Width: 240mm

The Harvey Quality Stamp

At Harvey Roofing Products, we take great care to ensure that every single one of our roofing tiles is manufactured to the utmost stringent quality standards. Being a division of Africa's leading steel supplier, Macsteel, we get to use the best steel. We then prepare and press the steel to the finest tolerances, coat the tile with the finest paints and binding materials, cover the tile with only the best surfaces and finally the tile with the best looks... And if you need rust protection, add the best rust protection coating when required. All this whilst inspecting the tile every step of the process.

Once complete, we take care to quality check every tile so as to ensure that it meets our exacting quality standards. Once we are satisfied that the final product meets our stringent quality standards, only then do we place our Harvey Quality Stamp on each tile.

This means you can rest assured that if the tile carries the Harveytile Quality Stamp, that it's a Harveytile manufactured to the most exacting standards.

If it doesn't say Harveytile, It's not a Harveytile... look for the Harveytile Quality Stamp.



Harvey Roofing Products

